




C-TECH C4

SERVO



**NC Automatic full-bodied bandsaw
for heavy-duty production**

C-TECH - C4 SERVO FULL-BODIED BANDSAW

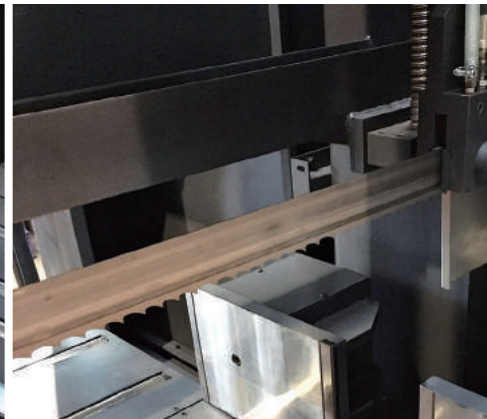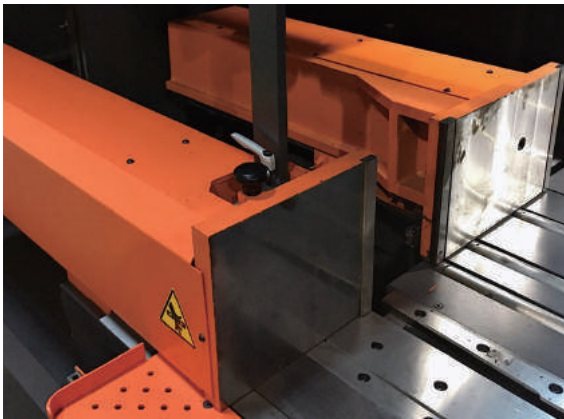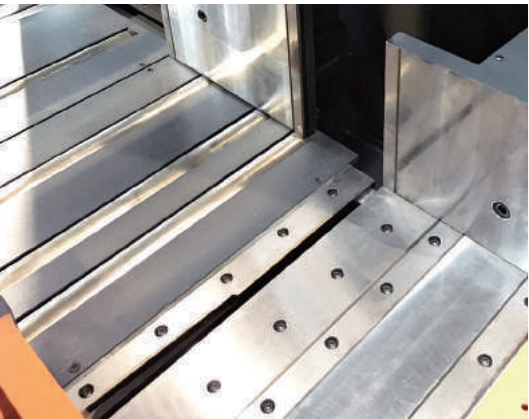

Standard features

- 7" HMI Touch Screen & Mitsubishi PLC Controller
- 100 Individual Jobs Programmable and Recalling
- Automatic Kerf Compensation
- Ergonomic door design with space for unloading. Feeding and sawing are SERVO driven.
- Automatic Guide Arm Positioning
- "Save-A-Blade" Function
- Hydraulic Saw Frame Travel via High Precision Linear Guide Way
- Roller feeding bed
- Double retractable vise
- Split Front Vise
- Vibration Damper
- Automatic blade tensioning
- Positioning Laser
- First Automatic Cut
- Inverter-Controlled Infinitely Variable Blade Speed
- Blade Life, Blade Height Display
- LED Working Light
- Vise Pressure Regulator
- Full Stroke Hydraulic Cylinder
- In Accordance with CE

Optional Accessories

- Deviation Detector
- Hydraulic Topclamps for bundle cutting
- Motor Ampere Display
- Screw-type Chip Conveyor
- Scraper-type Chip Conveyor
- 2 Meter Roller Table
- QR code scanning function for new material

Specifications C4

Capacity ●	460 mm (18")
Capacity ■	460 mm (18")
Capacity ■■	460 x 500 mm (18" x 19.7")
Saw Blade Speed	20-100 M/min (66-330 fpm)
Saw Blade Size LxWxH	6026 x 41 x 1.3 mm (237" x 1.3" x 0.051") With options : 6026 x 54 x 1.6 mm

Blade tension	Hydraulique
Blade Motor	7.5 HP (5.62 kW)
Hydraulic Motor	2 HP (1.5 kW)
Coolant Motor	1/4 HP (0.19 kW)
Oil Tank Capacity	60 L (15.84 gal)
Coolant Tank Capacity	120 L (31.68 gal)
Automatic Indexing Length	500 mm (19.7") Max.99M (max.99999")
Rest Piece	25 mm (0.98")
Workbed Height	700 mm (27.6")
Gross Weight	4150 kgs (9149 lbs)
Floor Space (W x L x H)	5190 x 2001 x 2355 mm (204" x 78.7" x 92.7")



Sawlogix



Cosen EMEA
europe@cosensaws.com

Cosen North America
info@cosensaws.com

Cosen Mechatronics Co., Ltd.
service@cosen.com.tw